

S Series

NOTHING PERFORMS
LIKE A HAUSCHILD SPEEDMIXER®

BLENDING RELIABILITY, EFFICIENCY,
ACCURACY & SAFETY BEAUTIFULLY



DAC 150.3 / 250.3



STANDARD FEATURES ON ALL DAC MACHINES

150 | 250 | 400 | 600 | 700 | 800 | 1100 | 3000 | 5000 | 10000



THE GOLD
STANDARD
IN BLADELESS
MIXING

LEGENDARY
ACCURACY &
REPEATABILITY

UNPARALLELED
QUALITY &
RELIABILITY

FAST, EFFICIENT,
VIRTUALLY
INDESTRUCTIBLE

NO
CLEANING
REQUIRED

CUSTOM
CONFIGURATIONS
& SOLUTIONS



Productive Innovations Limited

MixMe@Hauschild-SpeedMixer.UK
+44(0)1680 637 220
Hauschild-SpeedMixer.UK

Are you #MixingWithTheBest ?



**Hauschild
SpeedMixer®**

THE BEAUTY OF *PRECISION*


Technical Data



Specification	DAC 150.3 FV	DAC 150.3 FVZ	DAC 250.3 FV	DAC 250.3 FVZ
Mixing Capacity Min/Max ¹ :	5g ÷ 150g	5g ÷ 150g	5g ÷ 250g	5g ÷ 250g
Speed Min/Max:	300 rpm ÷ 3500 rpm	300 rpm ÷ 3500 rpm	350 rpm ÷ 2500 rpm	350 rpm ÷ 2500 rpm
Mixing Time Min/Max:	5s ÷ 60s	5s ÷ 300s	5s ÷ 60s	5s ÷ 300s
Voltage - Frequency:	100-240 V ~ 50-60 Hz	100-240 V ~ 50-60 Hz	100-240 V ~ 50-60 Hz	100-240 V ~ 50-60 Hz
Input Power:	0,95 KW	0,95 KW	0,95 KW	0,95 KW
Height – Closed Lid:	465 mm	465 mm	465 mm	465 mm
Height – Open Lid:	720 mm	720 mm	720 mm	720 mm
Width:	305 mm	305 mm	305 mm	305 mm
Depth:	405 mm	405 mm	405 mm	405 mm
Weight:	35 kg	35 kg	35 kg	35 kg
Programmable:	5 programs	5 programs	5 programs	5 programs

¹ Including material, mixing cup and holder.

The Original Hauschild SpeedMixer® DAC Configurations at a Glance

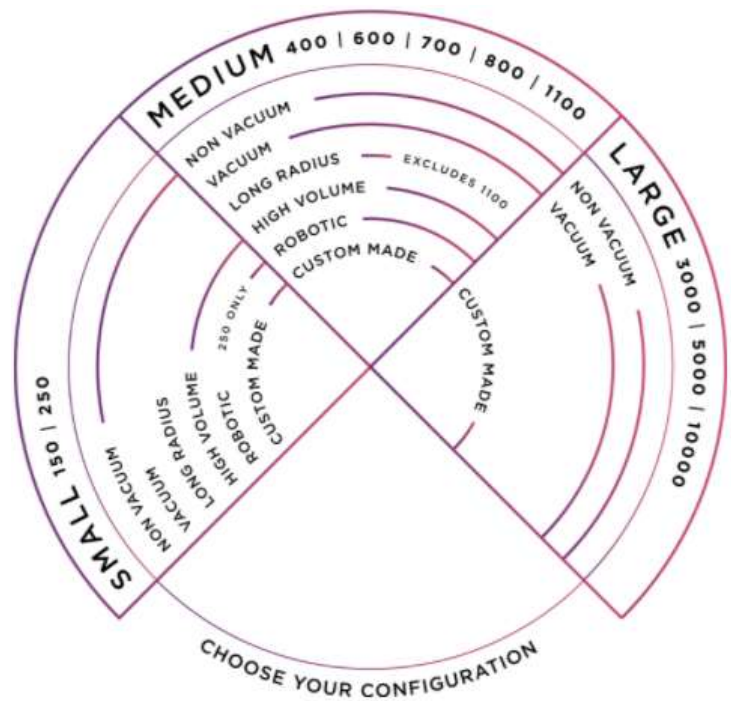

EXPERIENCE THE BEAUTY OF ACCURACY + ROI
ENGINEERED INTO EVERY HAUSCHILD SPEEDMIXER*



Productive Innovations Limited

MixMe@Hauschild-SpeedMixer.UK
+44(0)1680 637 220
Hauschild-SpeedMixer.UK

Are you #MixingWithTheBest ?



Hauschild
SpeedMixer®

THE BEAUTY OF PRECISION