

M Series

NOTHING PERFORMS
LIKE A HAUSCHILD SPEEDMIXER®

BLENDING RELIABILITY, EFFICIENCY,
ACCURACY & SAFETY BEAUTIFULLY




DAC 400.1 / 1100.1 FVZ



STANDARD FEATURES ON ALL DAC MACHINES

150 | 250 | 400 | 600 | 700 | 800 | 1100 | 3000 | 5000 | 10000

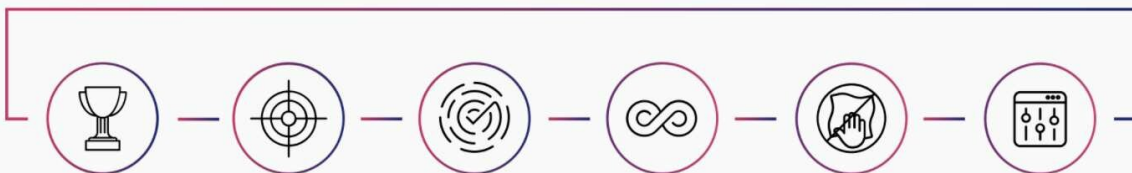

THE GOLD
STANDARD
IN BLADELESS
MIXING

LEGENDARY
ACCURACY &
REPEATABILITY

UNPARALLELED
QUALITY &
RELIABILITY

FAST, EFFICIENT,
VIRTUALLY
INDESTRUCTIBLE

NO
CLEANING
REQUIRED

CUSTOM
CONFIGURATIONS
& SOLUTIONS



Productive Innovations Limited

MixMe@Hauschild-SpeedMixer.UK
+44(0)1680 637 220
Hauschild-SpeedMixer.UK

Are you #MixingWithTheBest ?



Hauschild
SpeedMixer®

THE BEAUTY OF *PRECISION*


Technical Data

	DAC 400.1 FVZ	DAC 600.1 FVZ	DAC 700.1 FVZ	DAC 800.1 FVZ
Mixing Capacity Min/Max:	100g ÷ 400g	200g ÷ 600g	300g ÷ 700g	400g ÷ 800g
Speed Min/Max:	800 rpm ÷ 2750 rpm	800 rpm ÷ 2350 rpm	800 rpm ÷ 2100 rpm	800 rpm ÷ 1950 rpm
Mixing Time Min/Max:	5s ÷ 600s	5s ÷ 600s	5s ÷ 600s	5s ÷ 600s
Voltage - Frequency:	230 V – 50/60 Hz	230 V – 50/60 Hz	230 V – 50/60 Hz	230 V – 50/60 Hz
Input Power:	1,2 KW	1,2 KW	1,2 KW	1,2 KW
Height – Open Lid:	960 mm	960 mm	960 mm	960 mm
Width:	440 mm	440 mm	440 mm	440 mm
Depth:	640 mm	640 mm	640 mm	640 mm
Weight:	70 kg	70 kg	72 kg	75 kg

	DAC 1100.1 FVZ
Mixing Capacity Min/Max:	800g ÷ 1100g
Speed Min/Max:	800 rpm ÷ 1600 rpm
Mixing Time Min/Max:	5s ÷ 600s
Voltage - Frequency:	230 V – 50/60 Hz
Input Power:	1,2 KW
Height – Open Lid:	1030 mm
Width:	440 mm
Depth:	640 mm
Weight:	99 kg

¹ Including material, Mix Cup and Holder.

The Original Hauschild SpeedMixer® DAC Configurations at a Glance

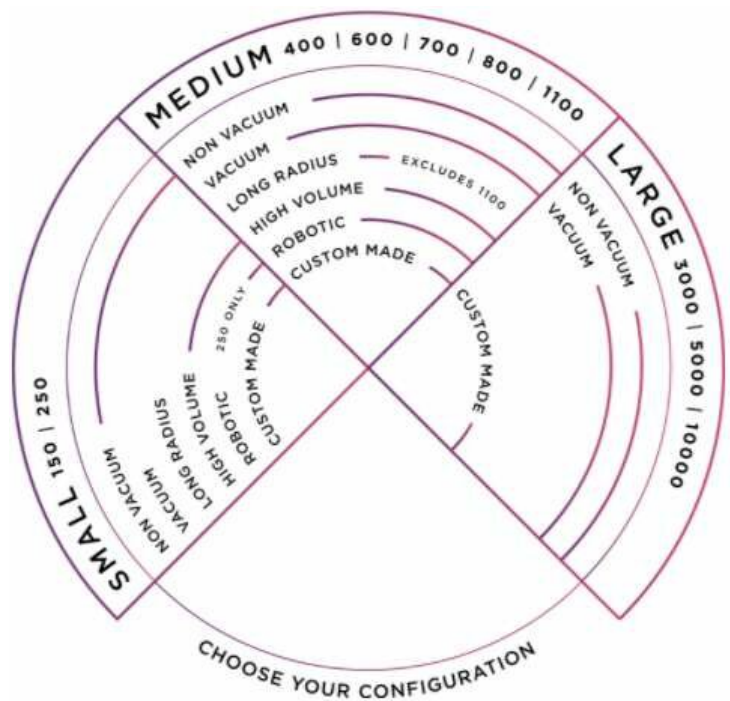

EXPERIENCE THE BEAUTY OF ACCURACY + ROI
ENGINEERED INTO EVERY HAUSCHILD SPEEDMIXER®

Productive Innovations Limited

MixMe@Hauschild-SpeedMixer.UK
+44(0)1680 637 220
Hauschild-SpeedMixer.UK

Are you #MixingWithTheBest ?



Hauschild
SpeedMixer®

THE BEAUTY OF PRECISION

